




Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF, RLK)

Product Description

Clic Clamp, 1/2" ALF,RCF,RLK polyamide black, halogen free
fire class UL94HB



Features/Benefits

Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

Technical Specifications



Product Line	Radiating Cable Accessories
Product Type	Hanger
Hanger Type	Clic clamp
Transmission Line Type	ALFU RLK* RCF12-50*A HCA12-50 RHCA12-50
Cable Type	Air Dielectric Radiating Cable
Cable Size	1/2"
Number of Cable / Waveguide Runs	1
Color	Black
Material	Polyamide
Fire Class	UL94 HB
Installation Temperature, °C(°F)	-20 to 80 (-4 to 176)
Operation Temperature, °C(°F)	-50 to 85 (-58 to 185)
Storage Temperature, °C(°F)	-50 to 85 (-58 to 185)
Package Quantity	500

Notes

* valid for all cable versions

Other Documentation

Clic clamp for RADIAFLEX® 1/2" (for ALF, RCF RLK)

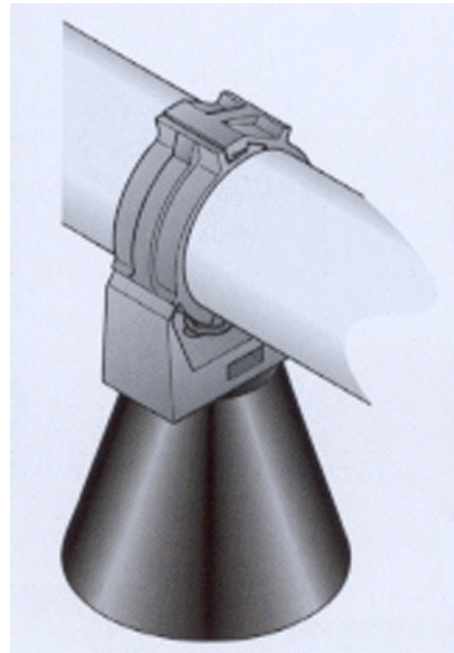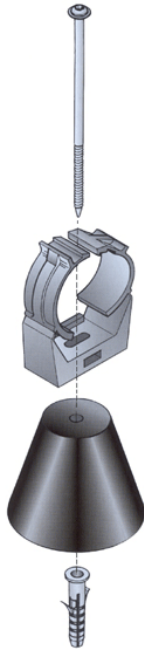

All information contained in the present datasheet is subject to confirmation at time of ordering